

40mm Diameter General Purpose Dry Pressure Gauge

Application

For the measurement of fluid liquids that are not:- highly viscous, high temperature (over 60°C), likely to solidify/crystallize or corrosive to copper or tin alloys.

Also suitable for gases (excluding oxygen or acetylene) up to 25 bar maximum.

Pneumatics
Air Compressors
HVAC Industry
Water Industry



Description

Nominal Size
40mm

Accuracy
+/- 2.5% FSD

Scales
PSI Outer (Black) & BAR Inner (Red) - Pressure
"HG Outer (Black) & BAR Inner (Red) - Vacuum

Ranges
-30/0"HG Vacuum to 0/400 PSI Pressure

Mounting Options
Bottom - Direct Mounting Only (standard)
Centre Back - Direct Mounting Only (standard)

Operating Temperature
Ambient: -20/+60°C
Medium: +60°C maximum

Temperature Effect
Variation in indication caused by temperature
 $\pm 0.04 \times (t_2 - t_1)\%$ of the span
t1 is the reference ambient temperature in °C
t2 is the ambient temperature in °C

Ingress Protection
IP 40 as per EN 60529

Case
Enameled Steel - Black

Window
Acrylic - Crystal clear, push-fit

Pressure Element
CU Alloy - Sealed Bourdon tube C-Type

Joints
Soldered with tin alloy


Movement
High Precision Brass

Process Connection & Block
Brass - 1/8" BSPT (tapered) male (standard)
Brass - 11mm Square block

Pointer
Aluminium - Black

Dial
Aluminium - White

Special Options
Other scales/ranges
Customer logo on dial
Other process connections

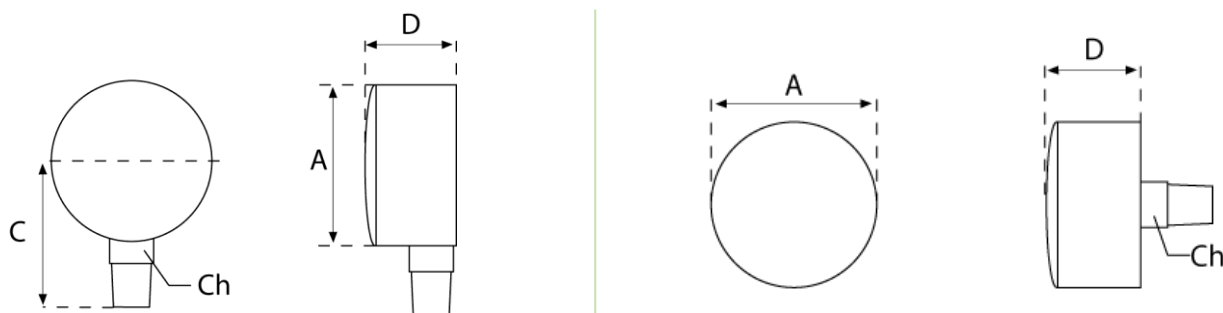

A	C	Ch	D
40.50	37.5	11	24

(Dimensions in mm)

Dial Markings

Outer Scale				Inner Scale			
Full Scale	Numbering Every	Divisions Major Every	Divisions Minor Every	Full Scale	Numbering Every	Divisions Major Every	Divisions Minor Every
-30 in Hg	-5 in Hg	-2.5 in Hg	-0.5 in Hg	-1 bar	-0.2 bar	-0.1 bar	-0.02 bar
15 psi	2.5 psi	0.5 psi	0.5 psi	1 bar	0.2 bar	0.1 bar	0.02 bar
30 psi	5 psi	1 psi	1 psi	2.1 bar	0.5 bar	0.1 bar	0.05 bar
60 psi	10 psi	2 psi	2 psi	4.2 bar	1 bar	0.2 bar	0.1 bar
100 psi	20 psi	10 psi	2 psi	7 bar	1 bar	0.2 bar	0.2 bar
160 psi	40 psi	10 psi	5 psi	11 bar	2 bar + 11 bar	1 bar	0.2 bar
200 psi	50 psi	25 psi	5 psi	14 bar	2 bar	1 bar	0.5 bar
300 psi	50 psi	10 psi	10 psi	21 bar	5 bar	1 bar	0.5 bar
400 psi	100 psi	50 psi	10 psi	28 bar	4 bar	1 bar	0.5 bar

Product Codes

	Nominal Size	Range	Connection	Thread
B001A139A	40mm	-30" Hg+bar	Direct Bottom	1/8" BSPT
B001A140A	40mm	15 psi+bar	Direct Bottom	1/8" BSPT
B001A142A	40mm	30 psi+bar	Direct Bottom	1/8" BSPT
B001A144A	40mm	60 psi+bar	Direct Bottom	1/8" BSPT
B001A146A	40mm	100 psi+bar	Direct Bottom	1/8" BSPT
B001A148A	40mm	160 psi+bar	Direct Bottom	1/8" BSPT
B001A150A	40mm	200 psi+bar	Direct Bottom	1/8" BSPT
B001A152A	40mm	300 psi+bar	Direct Bottom	1/8" BSPT
B001A154A	40mm	400 psi+bar	Direct Bottom	1/8" BSPT
B001E139A	40mm	-30" Hg+bar	Direct Centre Back	1/8" BSPT
B001E140A	40mm	15 psi+bar	Direct Centre Back	1/8" BSPT
B001E142A	40mm	30 psi+bar	Direct Centre Back	1/8" BSPT
B001E144A	40mm	60 psi+bar	Direct Centre Back	1/8" BSPT
B001E146A	40mm	100 psi+bar	Direct Centre Back	1/8" BSPT
B001E148A	40mm	160 psi+bar	Direct Centre Back	1/8" BSPT
B001E150A	40mm	200 psi+bar	Direct Centre Back	1/8" BSPT
B001E152A	40mm	300 psi+bar	Direct Centre Back	1/8" BSPT
B001E154A	40mm	400 psi+bar	Direct Centre Back	1/8" BSPT